




PROFESSIONAL 750 L



PROFESSIONAL 750 L
Cod. **00117100** EAN **8422248100823**

- High air flow capacity
- Extraction power (according to UNE/EN 61591): **600m³/h**
- Sound power (Reg.(EU) n°65/2014): 49dB(A)**
- Maximum energy consumption:
- **119W** (Professional 750L Model)
- LED E-14 lighting
(PROFESSIONAL 750L model)
- Easy-to-install system
- Metal grease filter with plate to collect grease washable in dishwasher**
- Metal housing and plastic impeller.
- 120mm outlet diameter
- Energy Class: D

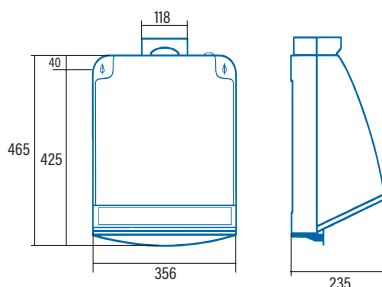

Code	00117100
EAN	8422248100823
Model	PROFESSIONAL 750 L
Type	Kitchen Extractor
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564"	
AEC (Annual Energy consumption) (kWh/annum)	155,9
EEl class (Energy Efficiency Class)	E
FDE (Fluid Dynamic Efficiency)	5,1
FDE class (Fluid Dynamic Efficiency Class)	F
LE (Lighting Efficiency) (lux/W)	1,5
LE class (Lighting Efficiency Class)	G
GFE (Grease Filtering Efficiency)	53,7
GFE Class (Grease Filtering Efficiency class)	F
Air flow at minimum speed (m ³ /h)	-
Air flow at maximum speed (m ³ /h)	600
Air flow at intensive speed (TURBO) (m ³ /h)	-
Sound Power Level at minimum speed (dB)	-
Sound Power Level at maximum speed (dB)	49
Sound Power Level at intensive speed (TURBO) (dB)	-
Po (Power Consumption in off mode) (W)	0
Ps (Power Consumption in standby) (W)	0
Integration directive EU 66/2014	
f (Time Increase Factor)	1,8
EEl (Energy Efficiency Index)	109,9
QBEP (Flow Rate at Best Efficiency Point) (m ³ /h)	287,3
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	106
WBEP (Electric Power Input at Best Efficiency Point) (W)	169,1
WL (Nominal Power Consumption of Lighting system) (W)	56
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	82
External Dimensions	
Width (mm)	356
Depth (mm)	235
Total max height(mm)	-
Total min height(mm)	650
Outlet Diameter (mm)	120
Characteristics	
Motor	Inducción
Extraction Levels	1
Motor Maximum Power Consumption	105W
Maximum Pressure	190
Intensive Speed (TURBO) Pressure	-
Control Type	-
Automatic shut-down timer	-
Electronic Filter Saturation Indicator	-
Filter Type	Metálico
Anti-grease Filter Number	1
Inner Shield	-
Lighting	
Light Type	E-14 x 28W
Adjustable Intensity Lighting	-
N° of Lamps	2
Installation	
Minimum height distance to a electric worktop hob (mm)	65
Minimum height distance to a gas worktop hob (mm)	65
Installation with Outlet tube to the exterior / Recirculating	EXTERIOR
Easy Instalation System	√
Electric Connection	
Total Rush Power (W)	161
Rated Voltage (V)	230
Network Frequency (Hz)	50
Electrical Insulation Class	CLASE I
Plug	-
Accessories	
Upper Decorative tube Extension	-
White Decorative Tube	-
Black Decorative Tube	-
Island Tube Enhancer	-
Check Valve	-
MAX PRO Metal Filter	-
Metal Filter	01140700*
DUAL Filter (metal + active charcoal)	-
Active Charcoal Filter	-
Noiseless Flexible Duct	-