



PROFESSIONAL 500




PROFESSIONAL 500
Cod. **00117400** EAN **8422248010832**

- High air flow capacity
- Extraction power (according to UNE/EN 61591): **450m³/h**
- Sound power (Reg.(EU) nº65/2014): 57dB(A)**
- Maximum energy consumption: **125W**
- Easy-to-install system
- Metal grease filter with plate to collect grease washable in dishwasher**
- Plastic housing and impeller
- 100 mm outlet diameter
- Energy Class: D

► **Accessories (not included)**

Active charcoal filter Cod. 01140800 / EAN 8422248072731

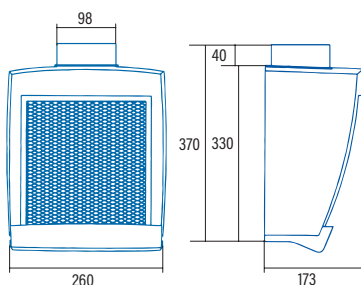

Code	00117400
EAN	8422248010832
Model	PROFESSIONAL 500
Type	Kitchen Extractor
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564"	
AEC (Annual Energy consumption) (kWh/annum)	69,3
EEL class (Energy Efficiency Class)	D
FDE (Fluid Dynamic Efficiency)	5,1
FDE class (Fluid Dynamic Efficiency Class)	F
LE (Lighting Efficiency) (lux/W)	-
LE class (Lighting Efficiency Class)	-
GFE (Grease Filtering Efficiency)	51,9
GFE Class (Grease Filtering Efficiency class)	F
Air flow at minimum speed (m ³ /h)	-
Air flow at maximum speed (m ³ /h)	450
Air flow at intensive speed (TURBO) (m ³ /h)	-
Sound Power Level at minimum speed (dB)	-
Sound Power Level at maximum speed (dB)	57
Sound Power Level at intensive speed (TURBO) (dB)	-
Po (Power Consumption in off mode) (W)	0
Ps (Power Consumption in standby) (W)	0
Integration directive EU 66/2014	
f (Time Increase Factor)	1,8
EEL (Energy Efficiency Index)	95,2
QBEP (Flow Rate at Best Efficiency Point) (m ³ /h)	134,6
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	142
WBEP (Electric Power Input at Best Efficiency Point) (W)	104,6
WL (Nominal Power Consumption of Lighting system) (W)	-
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	-
External Dimensions	
Width (mm)	260
Depth (mm)	173
Total max height(mm)	-
Total min height(mm)	650
Outlet Diameter (mm)	100
Characteristics	
Motor	Inducción
Extraction Levels	1
Motor Maximum Power Consumption	125W
Maximum Pressure	235
Intensive Speed (TURBO) Pressure	-
Control Type	-
Automatic shut-down timer	-
Electronic Filter Saturation Indicator	-
Filter Type	Metálico
Anti-grease Filter Number	1
Inner Shield	-
Lighting	
Light Type	-
Adjustable Intensity Lighting	-
Nº of Lamps	-
Installation	
Minimum height distance to a electric worktop hob (mm)	65
Minimum height distance to a gas worktop hob (mm)	65
Installation with Outlet tube to the exterior / Recirculating	EXTERIOR
Easy Instalation System	√
Electric Connection	
Total Rush Power (W)	125
Rated Voltage (V)	230
Network Frequency (Hz)	50
Electrical Insulation Class	CLASE II
Plug	-
Accessories	
Upper Decorative tube Extension	-
White Decorative Tube	-
Black Decorative Tube	-
Island Tube Enhancer	-
Check Valve	-
MAX PRO Metal Filter	-
Metal Filter	01140801*
DUAL Filter (metal + active charcoal)	01140800
Active Charcoal Filter	-
Noiseless Flexible Duct	-