




PROFESSIONAL 750



PROFESSIONAL 750
Cod. **00117000** EAN **8422248100816**

- High air flow capacity
- Extraction power (according to UNE/EN 61591): **600m³/h**
- Sound power (Reg.(EU) nº65/2014): 49dB(A)**
- Maximum energy consumption:
- **105W** (Professional 750 Model)
- Easy-to-install system
- Metal grease filter with plate to collect grease washable in dishwasher**
- Metal housing and plastic impeller.
- 120mm outlet diameter
- Energy Class: D

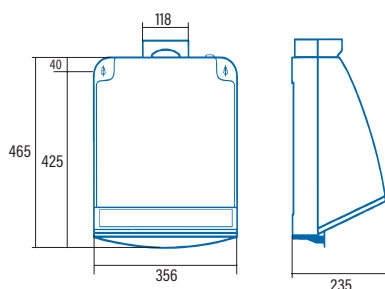

Code	00117000
EAN	8422248100816
Model	PROFESSIONAL 750
Type	Kitchen Extractor
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564"	
AEC (Annual Energy consumption) (kWh/annum)	54
EEl class (Energy Efficiency Class)	C
FDE (Fluid Dynamic Efficiency)	9,5
FDE class (Fluid Dynamic Efficiency Class)	E
LE (Lighting Efficiency) (lux/W)	-
LE class (Lighting Efficiency Class)	-
GFE (Grease Filtering Efficiency)	53,7
GFE Class (Grease Filtering Efficiency class)	F
Air flow at minimum speed (m ³ /h)	-
Air flow at maximum speed (m ³ /h)	600
Air flow at intensive speed (TURBO) (m ³ /h)	-
Sound Power Level at minimum speed (dB)	-
Sound Power Level at maximum speed (dB)	49
Sound Power Level at intensive speed (TURBO) (dB)	-
Po (Power Consumption in off mode) (W)	0
Ps (Power Consumption in standby) (W)	0
Integration directive EU 66/2014	
f (Time Increase Factor)	1,7
EEl (Energy Efficiency Index)	86
QBEP (Flow Rate at Best Efficiency Point) (m ³ /h)	287,3
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	106
WBEP (Electric Power Input at Best Efficiency Point) (W)	89,1
WL (Nominal Power Consumption of Lighting system) (W)	-
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	-
External Dimensions	
Width (mm)	356
Depth (mm)	235
Total max height(mm)	-
Total min height(mm)	650
Outlet Diameter (mm)	120
Characteristics	
Motor	Inducción
Extraction Levels	1
Motor Maximum Power Consumption	105W
Maximum Pressure	190
Intensive Speed (TURBO) Pressure	-
Control Type	-
Automatic shut-down timer	-
Electronic Filter Saturation Indicator	-
Filter Type	Metálico
Anti-grease Filter Number	1
Inner Shield	-
Lighting	
Light Type	-
Adjustable Intensity Lighting	-
Nº of Lamps	-
Installation	
Minimum height distance to a electric worktop hob (mm)	65
Minimum height distance to a gas worktop hob (mm)	65
Installation with Outlet tube to the exterior / Recirculating	EXTERIOR
Easy Instalation System	√
Electric Connection	
Total Rush Power (W)	105
Rated Voltage (V)	230
Network Frequency (Hz)	50
Electrical Insulation Class	CLASE I
Plug	-
Accessories	
Upper Decorative tube Extension	-
White Decorative Tube	-
Black Decorative Tube	-
Island Tube Enhancer	-
Check Valve	-
MAX PRO Metal Filter	-
Metal Filter	01140700*
DUAL Filter (metal + active charcoal)	-
Active Charcoal Filter	-
Noiseless Flexible Duct	-