

Intensive air renewal function Renova Turbo

Resultado de traducción
cata


DECORATIVE HOODS



RENOVA PURE AIR VNV90 XGBK

Cod. **02159420** EAN **8422248343077**

- Recirculation hood with integrated air purifier.** Eliminates odors with an efficiency of 98% and purifies 100% of dust, bacteria, viruses and volatile organic compounds.
- Touch Control Panel with digital display, automatic shut-down timer and cleaning filters indicator.
- Renova AIR purification function**
- Intensive air renewal function Renova Turbo**
- 6 extraction levels, 5 + 1 TURBO
- Motor maximum airflow free outlet: 1400m³/h
- Brushless motor. Sound power: 46dB(A), maximum: 64dB(A)
- High-efficiency lighting by intensity-adjustable two-tone warm / natural LED STRIP
- AUTO connectivity with automatic control from the CATA hob**
- Maintenance-free self-regeneratable carbon filter**
- Non-condensation filter and Filter condensation collection area
- Easy-to-install system
- Dishwasher-washable filters
- Black glass finishing
- Max. Pressure: 357 Pa

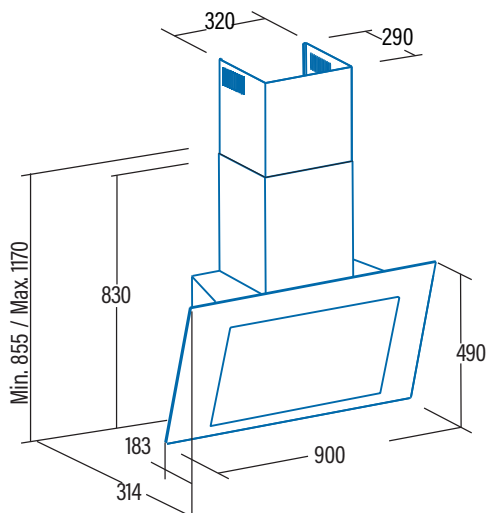

Code	02159420
EAN	8422248343077
Model	RENOVA PURE AIR VNV90
Type	Vertical
Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564	
AEC (Annual Energy consumption) (kWh/annum)	14,5
EEL class (Energy Efficiency Class)	A+++
FDE (Fluid Dynamic Efficiency)	39,7
FDE class (Fluid Dynamic Efficiency Class)	A
LE (Lighting Efficiency) (lux/W)	26,3
LE class (Lighting Efficiency Class)	B
GFE (Grease Filtering Efficiency)	75,5
GFE Class (Grease Filtering Efficiency class)	C
Air flow at minimum speed (m ³ /h)	283
Air flow at maximum speed (m ³ /h)	605
Air flow at intensive speed (TURBO) (m ³ /h)	842
Sound Power Level at minimum speed (dB)	46
Sound Power Level at maximum speed (dB)	64
Sound Power Level at intensive speed (TURBO) (dB)	69
Po (Power Consumption in off mode) (W)	0,4
Ps (Power Consumption in standby) (W)	0
Integration directive EU 66/2014	
f (Time Increase Factor)	0,6
EEL (Energy Efficiency Index)	29,3
QBEP (Flow Rate at Best Efficiency Point) (m ³ /h)	259,7
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	326,2
WBEP (Electric Power Input at Best Efficiency Point) (W)	59,2
WL (Nominal Power Consumption of Lighting system) (W)	3
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	79
External Dimensions	
Width (mm)	900
Depth (mm)	314
Total max height(mm)	1170
Total min height(mm)	855
Outlet Diameter (mm)	
Characteristics	
Motor	BT4DC
Extraction Levels	5 + 1
Motor Maximum Power Consumption	140
Maximum Pressure	357
Intensive Speed (TURBO) Pressure	365
Control Type	TCD6i
Automatic shut-down timer	√
Electronic Filter Saturation Indicator	√
Filter Type	Metallic
Anti-grease Filter Number	2+1
Inner Shield	-
Lighting	
Light Type	SS Led
Adjustable Intensity Lighting	√
Nº of Lamps	1
Installation	
Minimum height distance to a electric worktop hob (mm)	400
Minimum height distance to a gas worktop hob (mm)	650
Installation with Outlet tube to the exterior / Recirculating	BOTH
Easy Installation System	√
Electric Connection	
Total Rush Power (W)	143
Rated Voltage (V)	220-240
Network Frequency (Hz)	50
Electrical Insulation Class	CLASS I
Plug	-
Accessories	
Upper Decorative tube Extension	
White Decorative Tube	
Black Decorative Tube	
Island Tube Enhancer	
Check Valve	
MAX PRO Metal Filter	
Metal Filter	
DUAL Filter (metal + active charcoal)	
Active Charcoal Filter	
Noiseless Flexible Duct	